



Agados Trailer Catalogue

TRADITION | QUALITY | WIDE SELECTION OF PRODUCTS

CONTENT

Trailers with wheels along the loading platform (sheet metal side boards)	4
HANDY	5
NP	7
Trailers with wheels along the loading platform (plywood and aluminium side boards)	9
VZ	10
VZ EXCLUSIVE	12
ALUX	14
BIG SIZE	16
Trailers with wheels under the loading platform (aluminium side boards)	18
VZ EXPRESS	19
DONA	21
TITUS	23
VZ33	25
Motorcycle transporters	27
KANGAROO	28
Tilting trailers	30
ATLAS	31
DELTA	33
PORTHOS	35

Car transporters	37
ADAM	38
HSP	40
SMART	42
PANTER	43
ALFA	44
PUMA	46
Multipurpose trailers VZ O	48
VZ O	49
MINI EXCAVATOR trailers	51
MINI EXCAVATOR	52
Box trailers	54
Plywood box trailers	55
Sandwich box trailers	57
O3, O4 category trailers	59
MADONA	60
Aluminium programme	62
Trailer service	62
Spare parts, trailer technology	62

TRAILERS WITH WHEELS ALONG THE LOADING PLATFORM

(sheet metal side boards)



HANDY



NP



HANDY 3
with perforated
superstructure

HANDY

TRAILERS WITH WHEELS ALONG THE LOADING PLATFORM (sheet metal side boards)

PRACTICE HELPER FOR ALL-PURPOSE USE AT THE COTTAGE AND GARDEN



HANDY series trailers are trailers with a total weight of 750 kg and sheet metal side boards with a height of 300 or 350 mm.

The characteristic design includes a V-drawbar, sheet metal side boards with Al-Zn surface finish, 13" wheels, 7-pole electrical installation and plug, and 9 mm thick waterproof anti-slip plywood flooring.

As standard, HANDY trailers are equipped with 4 pcs anchoring eyes.



HANDY
15



HANDY
20




HANDY
3



HANDY
27



HANDY
7



HANDY
28



HANDY
8





HANDY with a canvas and a jockey wheel



HANDY with perforated superstructure




HANDY with 1.33 m load height canvas



HANDY with side superstructure and a lockable plastic cover



HANDY with a 0.89 m load height canvas

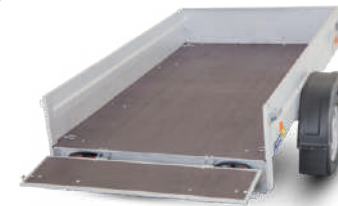

HANDY in tilting design with a rear plywood board as ramp

VARIANTS, MODIFICATIONS, ACCESSORIES

HANDY series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- support legs with holder
- side board extension
- coupling lock
- floor folding anchoring eyes
- lockable plastic cover
- flat canvas or canvas with construction
- wheel scotch blocks
- spare wheel
- spare wheel holder
- tilting design of trailer body
- 13-pole electrical installation and plug

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
HANDY 15	750	640	1470×1090×300	1	N
HANDY 20	750	630	2050×1090×300	1	N
HANDY 27	750	620	2050×1250×300	1	N
HANDY 28	750	620	2260×1250×300	1	N
HANDY 3	750	620	2050×1090×350	1	N
HANDY 7	750	620	2050×1250×350	1	N
HANDY 8	750	600	2260×1250×350	1	N

N = unbraked. The total weight can be reduced on request.

NP

TRAILERS WITH WHEELS ALONG THE LOADING PLATFORM (sheet metal side boards)

THE TRIED-AND-TESTED LONG-TERM BESTSELLER IN THE WIDE RANGE OF AGADOS TRAILERS
WILL ALWAYS FULFIL ALL YOUR EXPECTATIONS



NP series trailers are unbraked trailers with a total weight of 750 kg or braked trailers with a total weight up to 1300 kg and sheet metal side boards with a height of 400 mm.

Design with a tubular drawbar or V-drawbar, 400 mm-sheet metal side boards with Al-Zn surface finish, unbraked trailers with 7-pole electrical installation and plug and braked trailers with 13-pole electrical installation and plug, and 15 mm thick waterproof anti-slip plywood flooring.

As standard, NP trailers are equipped with 4 pcs anchoring eyes, braked trailers are equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.



NP 2



NP 3



NP 7



NP 26



Reinforcement
thanks to welded
rear trailer trough



Jockey wheel



NP in tilting design



NP with opening front board



NP with variable colour of mudguard and canvas



NP with 1.58 m load height canvas



NP in tilting design with opening front board and a rear plywood board as ramp

VARIANTS, MODIFICATIONS, ACCESSORIES

NP series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting legs complete with holder
- side board extension
- coupling lock
- floor folding anchoring eyes
- lockable plastic cover (eligible for NP-3 and NP-7)
- flat canvas or canvas with construction
- wheel scotch blocks
- spare wheel
- spare wheel holder
- hand jack for tilting design
- reinforced coupling for unbraked version
- reinforced axle for unbraked version
- axle dampers (shock absorbers)
- tilting design of trailer body
- opening front board
- railing
- 13-pole electrical installation and plug for unbraked version
- V-drawbar instead of tubular drawbar for unbraked version

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
NP 2	750	590	1765×1100×400	1	N/B
NP 3	750	600	2065×1100×400	1	N
NP 3	750, 1000	550, 790	2065×1100×400	1	B
NP 7	750	590	2065×1240×400	1	N
NP 7	750, 1000	530, 780	2065×1240×400	1	B
NP 26	750	570	2650×1240×400	1	N
NP 26 tilting	750	560	2650×1240×400	1	N
NP 26 tilting	750, 1000, 1200, 1300	520, 770, 970, 1070	2650×1240×400	1	B

N = unbraked. The total weight can be reduced on request.

TRAILERS WITH WHEELS ALONG THE LOADING PLATFORM

(plywood and aluminium
side boards)



VZ




VZ
EXCLUSIVE



ALUX



BIG SIZE

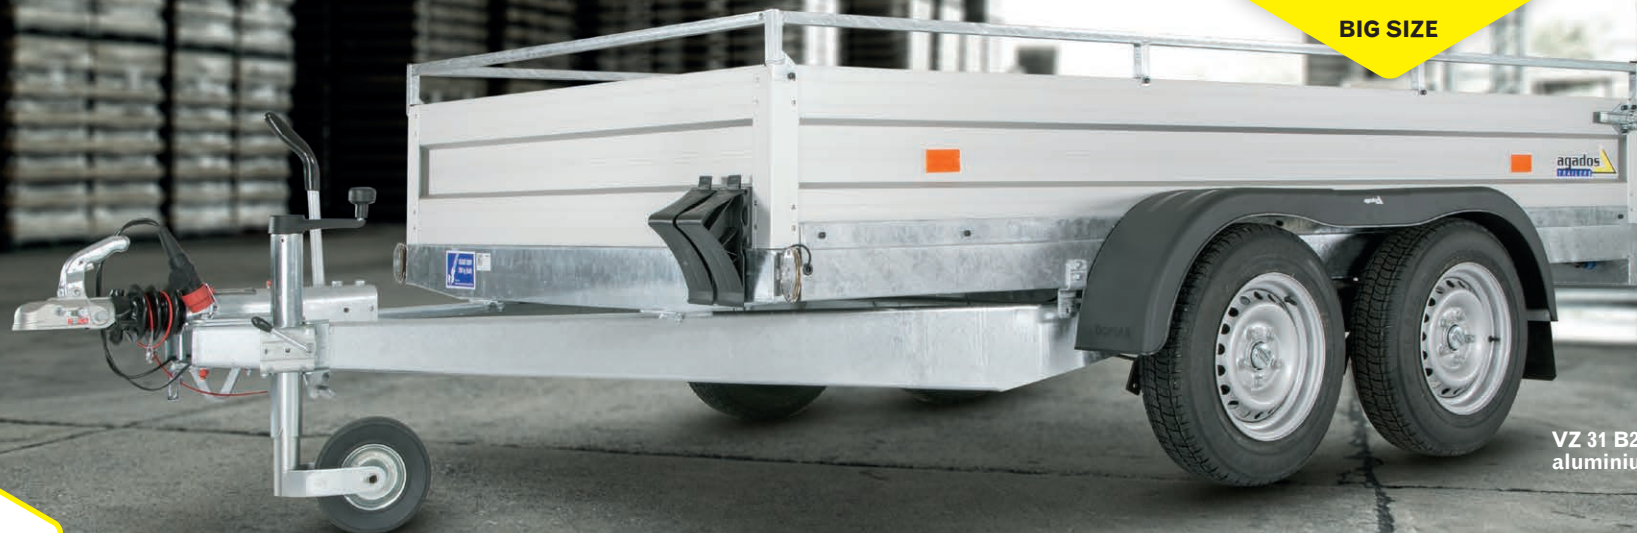

VZ 31 B2,
aluminium side boards



VZ

TRAILERS WITH WHEELS ALONG THE LOADING PLATFORM (plywood and aluminium side boards)



A HARD WORKER WITHOUT COMPROMISE! THE WELDED FRAME CONSTRUCTION AND THE OVERALL ROBUST DESIGN OF THE TRAILER COMBINED WITH A WIDE RANGE OF OPTIONAL ACCESSORIES MAKE THIS TRAILER A TRUE PRO FOR THE HIGHEST DEMANDS



VZ series trailers are unbraked trailers with a total weight of 750 kg or braked trailers with a total weight up to 2700 kg, 350 mm high side boards and completely welded chassis frame.

Tubular or V-drawbar design, 350 mm plywood or aluminium side boards, 13" wheels, 7-pole electrical installation and plug for unbraked trailers and 13-pole electrical installation and plug for braked trailers, 15 mm thick waterproof plywood flooring, solid welded chassis frame with reinforcements.

As standard, VZ series trailers are equipped with 6 pcs U-shaped anchoring eyes in side profiles (except VZ 18 and VZ 26 HS), braked versions are also equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.



VZ 18



VZ 21



VZ 23



VZ 26



VZ 26 HS




VZ 27



VZ 30



VZ 31





VZ with 1.53 m load height canvas



VZ in tilting design



VZ with hydraulically tilting body



VZ with aluminium side boards, side board superstructure and lockable plastic cover



VZ with side board superstructure

VARIANTS, MODIFICATIONS, ACCESSORIES

VZ series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting legs complete with holder
- side board extension (VZ 30 and VZ 31 trailers only in design with ALU side boards)
- coupling lock
- lockable plastic cover (except VZ 30 and VZ 31)
- aluminium cover (for VZ 30 and VZ 31)
- flat canvas or canvas with construction
- wheel scotch blocks
- spare wheel
- spare wheel holder
- hand jack for the tilting design
- reinforced coupling for unbraked versions
- reinforced axle for unbraked versions
- axle dampers (shock absorbers)
- tilting design of trailer body up to the total weight of 1300 kg
- opening front board
- railing
- V-drawbar instead of tubular drawbar for unbraked versions
- 13-pole electrical installation and plug for unbraked versions
- AGADOS LED lighting (for unbraked trailers)
- side board extension 500 mm (except VZ 30 and VZ 31)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
VZ 18	750	590	1760×1095×350	1	N
VZ 21	750	570	2060×1095×350	1	N
	1000, 1300	770, 1070		1	B
VZ 23	750	570	2060×1240×350	1	N
	1000, 1300	760, 1060		1	B
VZ 26	750	540, 470	2500×1300×350	1, 2	N
	1000, 1300, 1500	730, 1030, 1220		1	B
VZ 26 HS	2000	1620	2500×1240×350	2	B
	1300	920		1	B
VZ 27	750	520, 450	2500×1480×350	1, 2	N
	1000, 1300, 1500	720, 1020, 1200		1	B
VZ 30	2000	1620	3010×1300×300	2	B
	750	500, 430		1, 2	N
VZ 31	1000, 1300, 1500	700, 1000, 1190	3010×1540×300	1	B
	2000, 2700	1600, 2300		2	B
VZ 31	750	490, 410	3010×1540×300	1, 2	N
	1000, 1300, 1500	660, 960, 1160		1	B
VZ 31	2000, 2700	1590, 2290		2	B

N = unbraked. The total weight can be reduced on request.

VZ EXCLUSIVE

TRAILERS WITH WHEELS ALONG THE LOADING PLATFORM (plywood and aluminium side boards)


THE FINE-TUNED COMBINATION OF WATERPROOF PLYWOOD AND ALUMINIUM ELEMENTS WILL APPEAL TO YOU WHEN YOU FIRST ENCOUNTER THIS TRAILER



VZ EXCLUSIVE series trailers are trailers with a total weight of 750 kg, plywood side boards with aluminium edging with a height of 350 mm.

The characteristic design includes a V-drawbar, 350 mm light grey plywood side boards with Al-Zn surface finish, 13" wheels, 7-pole electrical installation and plug, and 15 mm thick waterproof anti-slip plywood flooring.

As standard, VZ EXCLUSIVE trailers are equipped with 4 pcs anchoring eyes.

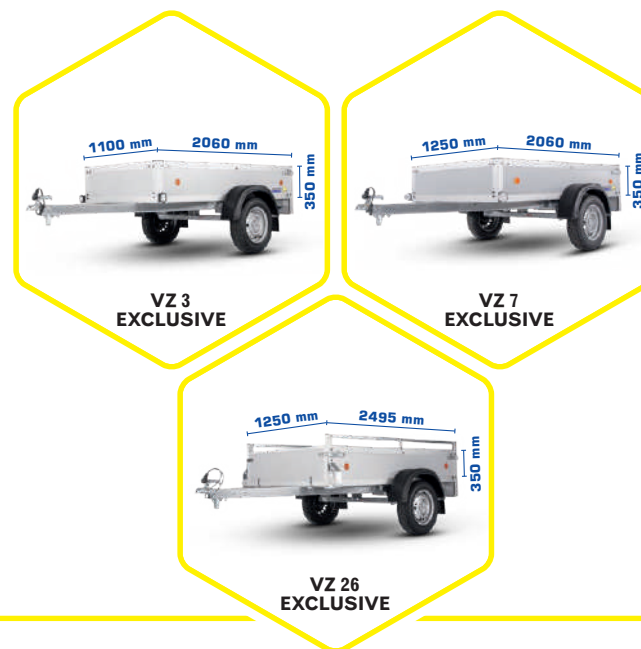



**VZ EXCLUSIVE with
0.88 m load height
canvas**



**VZ EXCLUSIVE with
opening front and
rear boards**



**VZ EXCLUSIVE with open-
ing front board and
railing**



**VZ EXCLUSIVE with side
board superstructure
and plastic
cover**

VARIANTS, MODIFICATIONS, ACCESSORIES

VZ EXCLUSIVE series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting legs with holder
- side board extension
- coupling lock
- floor folding anchoring eyes
- lockable plastic cover
- flat canvas or canvas with construction
- wheel scotch blocks
- spare wheel
- spare wheel holder
- tilting design of trailer body
- 13-pole electrical installation and plug for unbraked versions
- railing

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
VZ 3 EXCLUSIVE	750	600	2060×1100×350	1	N
VZ 3 EXCLUSIVE tilting	750	600	2060×1100×350	1	N
VZ 7 EXCLUSIVE	750	600	2060×1250×350	1	N
VZ 7 EXCLUSIVE tilting	750	600	2060×1250×350	1	N
VZ 26 EXCLUSIVE	750	580	2495×1250×350	1	N

N = unbraked. The total weight can be reduced on request.



ALUX series trailers are unbraked trailers with a total weight of 750 kg or braked trailers with a total weight up to 2700 kg, and with 350 mm high aluminium side boards.

V-drawbar design, 350 mm aluminium side boards, 13" wheels, 7-pole electrical installation and plug for unbraked trailers and 13-pole electrical installation and plug for braked trailers, 12 or 15 mm thick waterproof plywood flooring.

As standard, ALUX series trailers are equipped with 4 pcs anchoring eyes, braked versions are also equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.



ALUX 3



ALUX 7



ALUX 26



ALUX 27



ALUX 30



ALUX 31





ALUX with opening
front board



ALUX with 1.53 load
height can-
vas



ALUX with a lock-
able plastic
cover



ALUX in tilting design
with a rear board
as ramp



ALUX in tilting design
with a hand
jack

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
ALUX 3	750	620	2060×1100×350	1	N
ALUX 3 tilting	750	620	2060×1100×350	1	N
ALUX 3	1000, 1300	790, 1090	2060×1100×350	1	B
ALUX 7	750	620	2060×1255×350	1	N
ALUX 7 tilting	750	610	2060×1255×350	1	N
ALUX 7	1000, 1300	790, 1090	2060×1255×350	1	B
ALUX 26	750	580	2500×1255×350	1	N
ALUX 26 tilting	750	580	2500×1255×350	1	N
ALUX 26	1000, 1300	770, 1070	2500×1255×350	1	B
ALUX 26 tilting	1300	1070	2500×1255×350	1	B
ALUX 27	750	560	2500×1495×350	1	N
ALUX 27 tilting	750	550	2500×1495×350	1	N
ALUX 27	1000, 1300	750, 1050	2500×1495×350	1	B
ALUX 27 tilting	1300	1030	2500×1495×350	1	B
ALUX 30	750	530, 450	3000×1315×350	1, 2	N
ALUX 30 tilting	750	530	3000×1315×350	1	N
ALUX 30	1000, 1300	720, 1020	3000×1315×350	1	B
ALUX 30	2000, 2700	1610, 2310	3000×1315×350	2	B
ALUX 31	750	510, 440	3000×1555×350	1, 2	N
ALUX 31 tilting	750	510	3000×1555×350	1	N
ALUX 31	1000, 1300	700, 990	3000×1555×350	1	B
ALUX 31 tilting	1300	960	3000×1555×350	1	B
ALUX 31	2000, 2700	1600, 2300	3000×1555×350	2	B

N = unbraked. The total weight can be reduced on request.

VARIANTS, MODIFICATIONS, ACCESSORIES

ALUX series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting legs complete with holder
- side board extension
- coupling lock
- floor folding anchoring eyes
- lockable plastic cover (except ALUX 30 and ALUX 31)
- flat canvas or canvas with construction
- wheel scotch blocks
- spare wheel
- spare wheel holder
- hand jack for the tilting design
- axle dampers (shock absorbers)
- tilting design of trailer body
- opening front board (except ALUX 3 and ALUX 7)
- railing

BIG SIZE

TRAILERS WITH WHEELS ALONG THE LOADING PLATFORM (plywood and aluminium side boards)

A TANDEM LONGHORN WITH REMOVABLE SIDE BOARDS FOR SPECIALITIES SUCH AS BILLBOARD CAMPAIGNS



BIG SIZE series trailers are unbraked trailers with a total weight of 750 kg or braked trailers with a total weight up to 2000 kg and removable side boards. V-drawbar design, 350 mm aluminium side boards, 13" wheels, 7-pole electrical installation and plug for unbraked trailers, and 13-pole electrical installation and plug for braked trailers, 15 mm thick waterproof plywood flooring. The side boards are removable.

As standard, the Big Size trailers are equipped with 10 pcs U-shaped anchoring eyes in side profiles, braked versions also have jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.



Suitable for
lightweight yet
bulky and long
material

16





Big Size in flatbed design – single axle



Big Size with removable side boards



Big Size in flatbed design – double axle



Big Size in billboard design



Big Size in plateau design

VARIANTS, MODIFICATIONS, ACCESSORIES

BIG SIZE series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- folding supporting legs with crank and holders
- coupling lock
- wheel scotch blocks
- spare wheel
- spare wheel holder
- reinforced coupling for unbraked versions
- reinforced axle for unbraked version
- 13-pole electrical installation and plug for the unbraked version
- plateau design without side boards
- sheet metal covered advertising stand 5.1×2.4 m
- concrete blocks for eurobillboard stabilization
- AGADOS LED lighting (for unbraked trailers)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
BIG SIZE	750	400	4500×1840×350	1	N
	1300	860		1	B
	2000	1530		2	B

N = unbraked. The total weight can be reduced on request.

TRAILERS WITH WHEELS UNDER THE LOADING PLATFORM

(aluminium side boards)



VZ EXPRESS



DONA



TITUS



VZ 33



DONA B2,
2700 kg



VZ EXPRESS

TRAILERS WITH WHEELS UNDER THE LOADING PLATFORM (aluminium side boards)

A RELIABLE PARTNER FOR YOUR BUSINESS, A POWERFUL HELPER FOR DEMANDING USERS



VZ EXPRESS series trailers are unbraked trailers with a total weight of 750 kg or braked trailers with a total weight up to 2700 kg.

V-drawbar design, 350 mm aluminium side boards, 10", 12" or 13" wheels, 7-pole electrical installation and plug for unbraked trailers and 13-pole electrical installation and plug for braked trailers, 15 mm thick waterproof plywood flooring. Side boards are foldable and can be removed along with corner posts – plateau design can be created.

As standard, VZ EXPRESS series trailers are equipped with 6 or 12 pcs U-shaped anchoring eyes in side profiles, braked versions are also equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.



**VZ 22
EXPRESS**



**VZ 32
EXPRESS**



**VZ 35
EXPRESS**



**VZ 41
EXPRESS**



Removable folding side boards incl. the corner posts – plateau can be created



VZ EXPRESS with 10" wheels



VZ EXPRESS in a single-axle version with canvas



VZ EXPRESS in plateau design



VZ EXPRESS single-axle unbraked



VZ EXPRESS with folding removable side boards

VARIANTS, MODIFICATIONS, ACCESSORIES

VZ EXPRESS series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting legs complete with holder
- side board extension
- coupling lock
- flat canvas or canvas with construction
- wheel scotch blocks
- spare wheel
- spare wheel holder
- reinforced coupling for unbraked versions
- reinforced axle for unbraked versions
- axle dampers (shock absorbers)
- 13-pole electrical installation and plug for unbraked versions
- plateau with no side boards
- 10" wheels
- AGADOS LED lighting (for unbraked trailers)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
VZ 22 EXPRESS	750	510, 460	2555×1500×350	1, 2	N
	1000, 1200, 1300, 1500	720, 910, 1010, 1190		1	B
	2000	1630		2	B
VZ 32 EXPRESS	750	470, 410	3000×1800×350	1, 2	N
	1300, 1500	970, 1150		1	B
	2000	1580		2	B
VZ 35 EXPRESS	750	430, 380	3500×1800×350	1	N
	1300, 1500	930, 1110		1	B
	2000	1540		2	B
VZ 41 EXPRESS	750	340, 290	4170×2000×350	1	N
	1300, 1500	830, 1020		1	B
	2700	2170		2	B

N = unbraked. The total weight can be reduced on request.



DONA series trailers are braked trailers with a total weight from 2700 to 3500 kg.

V-drawbar design, 350 mm aluminium side boards, 13" or 14" wheels. 13-pole electrical installation and plug, 15 mm thick waterproof plywood flooring. Folding and removable side boards, solid ladder frame made of hot-dip galvanized parts.

As standard, DONA trailers are equipped with U-shaped anchoring eyes in side profiles in the quantity according to the length of the trailer (10 to 20 pcs), jockey wheel, wheel scotch blocks and AGADOS SMART rear LED lighting.

Large number of loading platform variants offered, see the technical specifications of each type in the table.





DONA with a canvas



DONA in plateau design



DONA with opening front board and removable side boards incl. the corner posts – plateau can be created



DONA with divided side boards



DONA with a canvas

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)
DONA 11	2000, 2700	1490, 2190	3825×1700×350
DONA 12	2000, 2700	1470, 2130	4100×1700×350
DONA A2	2700, 3000, 3500	2080, 2360, 2760	4170×2000×350
DONA A4	2700, 3000, 3500	1990, 2270, 2690	5050×2000×350
DONA A5	2700, 3000, 3500	1940, 2210, 2620	5750×2000×350
DONA A6	2700, 3000, 3500	1890, 2160, 2580	6130×2000×350
DONA A7	2700, 3000, 3500	1850, 2120, 2540	6610×2000×350
DONA 32	2700, 3000, 3500	2090, 2370, 2770	4170×2100×350
DONA 34	2700, 3000, 3500	1980, 2210, 2680	5050×2100×350
DONA 35	2700, 3000, 3500	1910, 2180, 2600	5750×2100×350
DONA 36	2700, 3000, 3500	1890, 2150, 2580	6130×2100×350
DONA 37	2700, 3000, 3500	1840, 2130, 2540	6610×2100×350
DONA 42	2700, 3000, 3500	2080, 2350, 2770	4170×2200×350
DONA 44	2700, 3000, 3500	1980, 2250, 2670	5050×2200×350
DONA 45	2700, 3000, 3500	1940, 2120, 2600	5750×2200×350
DONA 46	2700, 3000, 3500	1910, 2180, 2570	6130×2200×350
DONA 47	2700, 3000, 3500	1870, 2140, 2560	6610×2200×350
DONA 52	2700, 3000, 3500	2020, 2280, 2710	4170×2470×350
DONA 54	2700, 3000, 3500	1930, 2180, 2620	5050×2470×350
DONA 55	2700, 3000, 3500	1940, 2210, 2640	5750×2470×350
DONA 56	2700, 3000, 3500	1800, 2060, 2520	6130×2470×350
DONA 57	2700, 3000, 3500	1750, 2020, 2440	6610×2470×350
DONA 58	2700, 3000, 3500	1670, 1930, 2360	7430×2470×350
DONA 59	2700, 3000, 3500	1560, 1820, 2250	8630×2470×350
DONA 50	2700, 3000, 3500	1460, 1730, 2150	9830×2470×350

The total weight can be reduced on request.

VARIANTS, MODIFICATIONS, ACCESSORIES

DONA series trailers can be equipped with useful accessories or various modifications can be selected

- opening front board
- DIN 40 drawbar lug
- coupling lock
- 10", 12" wheels
- spare wheel
- spare wheel holder
- rear supporting legs tilting
- axle dampers (shock absorbers)
- divided side boards (from loading platform length 7.4 m as standard)
- folding middle post with divided side boards
- storage of the ramps under the loading area
- underrun protection
- height-adjustable drawbar
- coupling with stabilizer
- aluminium anti-slip floor (corrugated sheet)



TITUS series trailers are unbraked trailers with a total weight of 750 kg, 350 mm high aluminium side boards and tilting trailer body.

V-drawbar design, tilting body, folding and removable 350 mm aluminium side boards, 13" wheels, 7-pole electrical installation and plug, 9 mm thick waterproof plywood flooring.

As standard, TITUS series trailers are equipped with 4 pcs anchoring eyes.





**TITUS with folding
removable side
boards**



**TITUS in plateau
design**



**TITUS in tilting
position**



**TITUS with opening rear
board in the tilting
position**



**TITUS with 1.53 load
height canvas**

VARIANTS, MODIFICATIONS, ACCESSORIES

TITUS series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting legs complete with holder
- coupling lock
- floor folding anchoring eyes
- flat canvas or canvas with construction
- wheel scotch blocks
- spare wheel (loose wheel only)
- spare wheel holder under loading platform
- 13-pole electrical installation and plug
- 10" wheels

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
TITUS	750	580	2060×1470×350	1	N

N = unbraked. The total weight can be reduced on request.

VZ 33

TRAILERS WITH WHEELS UNDER THE LOADING PLATFORM (aluminium side boards)

EVERYTHING YOU EXPECT FROM A TRAILER CAN BE FOUND IN THIS
MODEST-LOOKING, BUT POWERFUL MODEL



VZ 33 series trailers are braked trailers with a total weight from 1300 to 3500 kg with robust completely-welded chassis frame.

V-drawbar design, 350 mm aluminium side boards, 13" wheels, 13-pole electrical installation and plug, 15 mm thick waterproof plywood flooring. Side boards are folding and removable.

As standard, VZ series trailers are equipped with 8 pcs U-shaped anchoring eyes in side profiles, jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.





Ramp storage in rear tray
behind the registra-
tion plate



VZ 33 in bevelled
canvas de-
sign



VZ 33 with opening front
board, removable side
boards and
posts



VZ 33 in plateau
design



VZ 33 in single-axle
design



Robust fully welded
frame

VARIANTS, MODIFICATIONS, ACCESSORIES

VZ 33 series trailers can be equipped with useful accessories or various modifications can be selected

- opening front board
- 10", 12" wheels
- flat canvas or canvas with construction
- side board extension
- coupling lock
- spare wheel
- spare wheel holder
- supporting legs folding
- axle dampers (shock absorbers)
- storage of the ramps under the loading area
- underrun protection
- height-adjustable drawbar
- aluminium anti-slip floor (corrugated sheet)
- side board extension 500 mm

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
VZ 33	1300	910	3330×1700×350	1	B
	1500	1100			B
	2000	1540			B
	2700	2230		2	B
	3000	2460			B
	3500	2930			B

The total weight can be reduced on request.

MOTORCYCLE TRANSPORTERS



KANGAROO



KANGAROO VZ 21 N1,
750 kg



KANGAROO

MOTORCYCLE TRANSPORTERS


A SIMPLE AND EFFICIENT SOLUTION FOR TRANSPORTING YOUR MOTORCYCLES




KANGAROO series trailers are unbraked trailers with total weight of 750 kg or braked trailers with total weight up to 1300 kg intended for the transport of motorcycles. The trailers have solid completely-welded construction, are available with tubular or V-drawbar, 13" wheels, 7-pole electrical installation and plug for unbraked trailers and 13-pole electrical installation and plug for braked trailers.

KANGAROO 12 and KANGAROO 15 variants have 15 mm thick waterproof plywood flooring.

As standard, KANGAROO trailers are equipped with skids and ramps including their lodgement, 6 pcs U-shaped anchoring eyes in side profiles (except KANGAROO VZ 21), braked version also have jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.

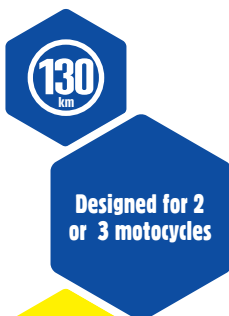

KANGAROO
VZ 21

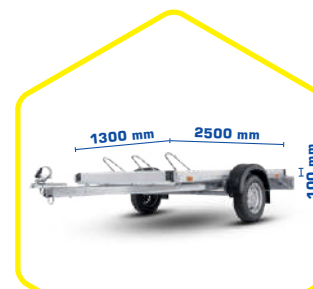

KANGAROO
12



KANGAROO
15



KANGAROO
ramp



Detail of the
rail



Detail of the ramp
anchorage



KANGAROO with a construc-
tion and 1.57 load
height canvas



KANGAROO with side
board super-
structure

VARIANTS, MODIFICATIONS, ACCESSORIES

KANGAROO series trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting legs with holder
- side extension (except for KANGAROO VZ 21)
- coupling lock
- canvas with construction (except for KANGAROO VZ 21)
- wheel scotch blocks
- spare wheel
- spare wheel holder
- axle damper (shock absorber)
- reinforced axle for unbraked version
- AGADOS LED lighting (for unbraked trailers)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
KANGAROO VZ 21	750, 750, 1000	590, 530, 780	2060×1095	1	N, B, B
KANGAROO 12	750, 1000, 1300	520, 720, 1020	2500×1300×100	1	N, B, B
KANGAROO 15	750, 1000, 1300	510, 700, 1000	2500×1480×100	1	N, B, B

N = unbraked. The total weight can be reduced on request.

TILTING TRAILERS



ATLAS



DELTA



PORTHOS



ATLAS B2,
2700 kg





ATLAS series trailers are braked trailers with a total weight up to 3500 kg and with three-side tilting body. Loading area 3300×1700×350 mm, 350 mm folding and removable aluminium side boards.

Completely-welded lower and upper frame. V-drawbar, 13" or 14" wheels, 13-pole electrical installation and plug, 15 mm thick waterproof plywood floor can be covered with Zn abrasion-resistant metal sheet. Manual or electric hydraulic, opening or swinging rear board. 8 pcs U-shaped anchoring eyes in side profiles.

As standard, ATLAS trailers are equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.

ALU ramps lodgement in the lower frame as standard.



ATLAS





Hydraulic three-sided
tilting of the
body



ATLAS in the tilting
position



Detail of ramp lodgement
under the loading
area



AGADOS rear LED
lighting



ATLAS with side board
extension and
overlapping
canvas



Opening front
board

VARIANTS, MODIFICATIONS, ACCESSORIES

ATLAS series trailers can be equipped with useful accessories or various modifications can be selected

- rear supporting legs tilting
- side board extension
- coupling lock
- flat canvas or canvas with construction
- Zn sheet metal on the floor
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)
- opening front board
- electric hydraulic control
- small emergency hand pump for electric hydraulic
- coupling with a stabilizer
- height-adjustable drawbar
- aluminium drive-on ramps 2650 mm / 325 mm, load capacity 2800 kg in pair
- 1 m mesh extension, height alternatives possible
- swinging rear board

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
ATLAS*	2700	2010	3320×1700×350	2
	3000	2270		
	3500	2630		

* fixed front board, manual hydraulics, plywood floor, opening rear board.
The total weight can be reduced on request.

DELTA

TILTING TRAILERS

A WELCOME ADDITION TO ANY BUILDER



DELTA series trailers are braked trailers with a total weight up to 2700 kg and with one-side tilting body. Loading area 2570×1470×350 mm, 350 mm folding and removable aluminium side boards, removable corner posts – plateau design can be created.

Completely-welded upper frame. Solid V-drawbar, 13" wheels, 13-pole electrical installation and plug, 15 mm thick waterproof plywood floor can be covered with Zn abrasion-resistant metal sheet. Manual or electric hydraulic.

As standard, DELTA trailers are equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.





DELTA in flatbed design



Electric hydraulic control



DELTA in plateau design



DELTA with wire mesh superstructure



DELTA in flatbed design – single-sided tilting of the body

VARIANTS, MODIFICATIONS, ACCESSORIES

DELTA series trailers can be equipped with useful accessories or various modifications can be selected

- side board extension
- coupling lock
- flat canvas or canvas with construction
- Zn sheet metal on the floor
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)
- electric hydraulic control
- small emergency hand pump for electric hydraulic
- coupling with a stabilizer
- height-adjustable drawbar
- 1 m mesh extension, height alternatives possible

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
DELTA	1300	920	2570×1470×350	1
	1500	1090		
	2000	1520		2
	2700	2210		

The total weight can be reduced on request.

PORTHOS

TILTING TRAILERS

THE LARGEST OF THE THREE CONSTRUCTION MUSKETEERS
– IN SIZE AND PERFORMANCE



PORTHOS series trailers are braked trailers with a total weight 3500 kg and with three-side tilting body. Loading area 4180×2100×350 mm, 350 mm folding and removable aluminium side boards, removable corner posts – plateau design can be created.

Completely-welded lower and upper frame. V-drawbar design, 14" wheels, 13-pole electrical installation and plug. 15 mm thick waterproof plywood floor can be covered with Zn abrasion-resistant metal sheet. Electric hydraulic, opening front board, swinging rear board.

As standard, PORTHOS trailers are equipped with 10 pcs U-shaped anchoring eyes in side profiles, jockey wheel, wheel scotch blocks and AGADOS SMART rear LED lighting.

ALU ramps lodgement in the lower frame as standard.



35



Waterproof plywood floor
covered with Zn
metal sheet



PORTHOS with wire
mesh super-
structure



Three-sided tilting
– detail



Three-sided
tilting



Electric hydraulic
control

VARIANTS, MODIFICATIONS, ACCESSORIES

PORTHOS series trailers can be equipped with useful accessories or various modifications can be selected

- rear supporting legs tilting
- side board extension
- coupling lock
- flat canvas or canvas with construction
- 1 m mesh extension, height alternatives possible
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)
- coupling with a stabilizer
- height-adjustable drawbar
- aluminium drive-on ramps 2650 mm / 325 mm, load capacity 2800 kg in pair

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
PORTHOS	3500	2450	4180×2100×350	2

The total weight can be reduced on request.

CAR TRANSPORTERS



ADAM



HSP



SMART



PANTER



ALFA



PUMA



ADAM AL plateau B2,
2700 kg



ADAM series trailers are braked trailers with a total weight from 2700 to 3500 kg with hydraulically tilting upper frame and rear ALU ramp for easy drive-on.

V-drawbar, 350 mm aluminium side boards, 12" wheels, 13-pole electrical installation and plug. 15 mm thick waterproof plywood flooring (ADAM AL version floor made of ALU profiles with anti-slip treatment), folding and removable side boards, massive frame made of welded hot-dip galvanized parts, protective frame (railing) with adjustable front wheel stop for plateau design.

As standard, ADAM trailers are equipped with 12 pcs U-shaped anchoring eyes in side profiles, jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.



Large number of loading platform variants offered, see the technical specifications of each type in the table.



ADAM in plateau design
in the tilting
position



Sliding winch across the
entire width of
the trailer



ADAM with side boards and
hydraulically tilting
frame for easy
drive-on



Ramp lodgement un-
der the loading
area

VARIANTS, MODIFICATIONS, ACCESSORIES

ADAM series trailers can be equipped with useful accessories or various modifications can be selected

- opening front board
- coupling lock
- 10" or 13" wheels
- canvas with construction
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)
- coupling with stabilizer
- rear drive-on ramps (instead of ALU ramp)
- removable hand winch
- electric winch
- aluminium anti-slip floor (corrugated sheet)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Design	Loading platform (mm)	Number of axles
ADAM A2 special	2700	2030	plateau	4170×1890	2
		2000	flatbed	4170×1890×350	
ADAM 12	2700	2030	plateau	4170×2095	2
		2000	flatbed	4170×2095×350	
	3000	2300	plateau	4170×2095	
		2280	flatbed	4170×2095×350	
ADAM 13	3500	2726	plateau	4170×2095	2
		2690	flatbed	4170×2095×350	
	2700	1970	plateau	4500×2095	
		1960	flatbed	4500×2095×350	
ADAM 15	3000	2260	plateau	4500×2095	2
		2250	flatbed	4500×2095×350	
	3500	2690	plateau	4500×2095	
		2660	flatbed	4500×2095×350	
ADAM 17	2700	1910	plateau	5170×2095	2
		1870	flatbed	5170×2095×350	
	3000	2190	plateau	5170×2095	
		2160	flatbed	5170×2095×350	
ADAM 32	3500	2600	plateau	5170×2095	2
		2570	flatbed	5170×2095×350	
	2700	1840	plateau	6130×2095	
		1820	flatbed	6130×2095×350	
ADAM 33	3000	2110	plateau	6130×2095	2
		2000	flatbed	6130×2095×350	
	3500	2510	plateau	6130×2095	
		2480	flatbed	6130×2095×350	
ADAM 35	2700	1910	plateau	4170×2470	2
		1870	flatbed	4170×2470×350	
	3000	2260	plateau	4170×2470	
		2240	flatbed	4170×2470×350	
ADAM 37	3500	2570	plateau	4170×2470	2
		2540	flatbed	4170×2470×350	
	2700	1840	plateau	4500×2470	
		1800	flatbed	4500×2470×350	
ADAM AL	3000	2120	plateau	4500×2470	2
		2110	flatbed	4500×2470×350	
	3500	2450	plateau	4500×2470	
		2510	flatbed	4500×2470×350	
ADAM 39	2700	1760	plateau	5170×2470	2
		1720	flatbed	5170×2470×350	
	3000	2040	plateau	5170×2470	
		2010	flatbed	5170×2470×350	
ADAM 41	3500	2430	plateau	5170×2470	2
		2400	flatbed	5170×2470×350	
	2700	1680	plateau	6130×2470	
		1660	flatbed	6130×2470×350	
ADAM 43	3000	1950	plateau	6130×2470	2
		1920	flatbed	6130×2470×350	
	3500	2330	plateau	6130×2470	
		2290	flatbed	6130×2470×350	
ADAM 45	2700	2060	plateau	4430×2095	2
		1990	flatbed	4430×2095×350	
ADAM 47	3500	2750	plateau	4430×2095	2
		2680	flatbed	4430×2095×350	

The total weight can be reduced on request.



HSP series trailers are braked trailers with a total weight from 1300 to 1500 kg.


V-drawbar design, hydraulically tilting axle for lowering trailer body for easy drive-on, 13" or 14" wheels, 13-pole electrical installation and plug. 15 mm thick waterproof plywood flooring, solid welded frame, protective railing, 8 pcs U-shaped anchoring eyes.

As standard, HSP trailers are equipped with jockey wheel with holder and wheel scotch blocks.

130
km

Hydraulically
tilting axles

40



HSP



Hydraulically
tilting axles



HSP in side board
design



HSP with side boards and
wire mesh super-
structure



HSP in box
design



Detail – box design
with folding
roof



HSP in tilting
position

VARIANTS, MODIFICATIONS, ACCESSORIES

HSP series trailers can be equipped with useful accessories or various modifications can be selected

- aluminium hem instead of railing
- coupling lock
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)
- side board extension 350 mm without rear board (instead of 100 mm hem)
- side board extension 350 mm with rear retractable board (instead of 100 mm hem)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles	Unbraked / braked
HSP	1300	990	3040×1600	1	B
	1500	1120			


The total weight can be reduced on request.



SMART series trailers are braked trailers with a total weight from 1300 to 1500 kg. V-drawbar design, solid welded frame with railing, 15 mm thick waterproof plywood flooring, 10 pcs U-shaped anchoring eyes, iron ramps, 13" or 14" wheels, 13-pole electrical installation and plug.

As standard, SMART trailers are equipped with jockey wheel with holder and wheel scotch blocks.

SMART series trailers cannot be equipped with LED lighting.

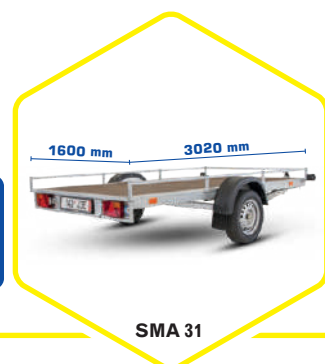

VARIANTS, MODIFICATIONS, ACCESSORIES

SMART series trailers can be equipped with useful accessories or various modifications can be selected

- removable hand winch
- coupling lock
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
SMART 31	1300	920	3020×1600	1
	1500	1080		

The total weight can be reduced on request.

PANTER

CAR TRANSPORTERS

DESIGNED, DEVELOPED, MANUFACTURED AND TESTED TO TRANSPORT CARS



PANTER series trailers are braked trailers with a total weight from 1800 to 2700 kg.

V-drawbar design, hydraulically tilting body for lowering trailer body for easy drive-on, perforated ramps, 900 kg load capacity hand winch, 13" wheels, 13-pole electrical installation and plug.

As standard, PANTER trailers are equipped with jockey wheel with holder and wheel scotch blocks.



PANTER in tilting position – detail



PANTER in standard design in tilting position



PANTER in standard design including 900 kg load capacity winch

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
PANTER	2700	2120	4140×1935	2

The total weight can be reduced on request.


VARIANTS, MODIFICATIONS, ACCESSORIES

PANTER series trailers can be equipped with useful accessories or various modifications can be selected


- axle dampers (shock absorbers)
- coupling lock
- spare wheel
- spare wheel holder



PANTER



Tilting body with no ramps

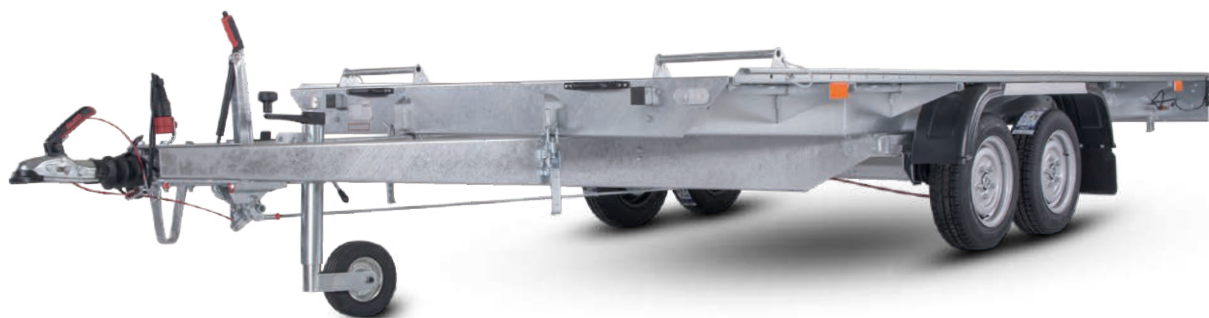

ALFA series trailers are braked trailers with a total weight from 1800 to 2700 kg with tilting body and ramp.

V-drawbar design, hydraulically tilting body for lowering trailer body for easy drive-on, perforated ramps with front slide stop. Possibility of winch to be mounted on left or right side, 13" wheels, 13-pole electrical installation and plug.

As standard, ALFA trailers are equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.




ALFA B1



ALFA

130
km

Tilting body
with ramps

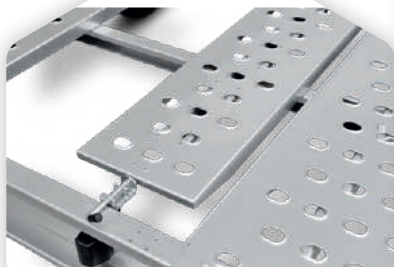

Detail of the ramp attachment



Tilting body with ramps for easy car drive-on



ALFA in a single-axle design



ALFA in standard design in tilting position

VARIANTS, MODIFICATIONS, ACCESSORIES

ALFA series trailers can be equipped with useful accessories or various modifications can be selected

- removable hand winch 900 kg
- coupling lock
- axle dampers (shock absorbers)
- spare wheel
- spare wheel holder

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
ALFA	1800	1320	3600×2005	1
	2700	2150	4000×2005	2



The total weight can be reduced on request.



PUMA series trailers are braked trailers with a total weight of 2700 kg with ramp.

V-drawbar design, perforated ramps with front slide stop. Possibility of winch to be mounted on left or right side, 13" wheels, 13-pole electrical installation and plug.

As standard, PUMA trailers are equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.

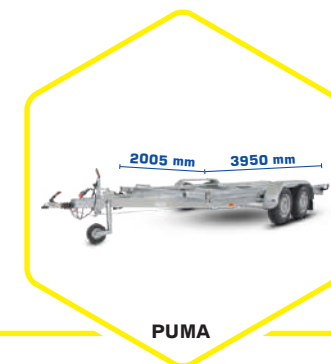



PUMA B2,
2700 kg

PUMA in standard
design

PUMA with
ramps

VARIANTS, MODIFICATIONS, ACCESSORIES

PUMA series trailers can be equipped with useful accessories or various modifications can be selected

- removable hand winch 900 kg
- coupling lock
- axle dampers (shock absorbers)
- spare wheel
- spare wheel holder

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
PUMA	2700	2140	3950×2005	2

The total weight can be reduced on request.

MULTIPURPOSE TRAILERS

VZ O



VZ 26 O B1,
1300 kg



VZ O multipurpose trailers are unbraked trailers with a total weight of 750 kg or braked trailers with a total weight up to 1300 kg.

Tubular drawbar of V-drawbar design, 1235 mm plywood side boards, 13" wheels, 7-pole electrical installation and plug for unbraked trailers and 13-pole electrical installation and plug for braked trailers.

15 mm thick waterproof plywood flooring, solid welded chassis frame with reinforcements, rear loading ramp.

The braked version of VZ O multipurpose trailers is equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting as a standard.



VZ 18 O



VZ 26 O



VZ 27 O



VZ 21 O



VZ 23 O



The trailer design encourages versatile use



VZ O with a ramp
and side
railing



VZ O multifunc-
tional trailer



VZ O with aluminium
cover and side
door



VZ O with overlap-
ping canvas



VZ O with plastic
cover and roof
rack



VZ O with laminate
cover and side
flap

VARIANTS, MODIFICATIONS, ACCESSORIES

VZ O multipurpose trailers can be equipped with useful accessories or various modifications can be selected

- jockey wheel with holder
- supporting leg with holder
- coupling lock
- reinforced AGADOS axle
- reinforced coupling
- reinforced wheels
- flat canvas
- lockable plastic cover
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)
- anti-slip rubber on the floor
- rear double-wing door with upper sliding bar
- side door with a lock
- side board increase up to 1500 mm of height
- aluminium sheet on the floor
- AGADOS LED lighting (for unbraked trailers)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Unbraked / braked
VZ 18 O	750	520	1760×1095×1235	N
VZ 21 O	750	500	2060×1095×1235	N
	1000	690		B
	1300	990		B
VZ 23 O	750	470	2060×1240×1235	N
	1000	650		B
	1300	950		B
VZ 26 O	750	460	2500×1240×1235	N
	1000	650		B
	1300	940		B
VZ 27 O	750	430	2500×1480×1235	N
	1000	620		B
	1300	910		B

N = unbraked. The total weight can be reduced on request.

MINI EXCAVATOR TRAILERS



ZN
MINI EXCAVATOR



MINI EXCAVATOR

MINI EXCAVATOR TRAILERS



TRAILERS INTENDED FOR TRANSPORTING MINI EXCAVATORS
AND SMALL CONSTRUCTION EQUIPMENT

MINI EXCAVATOR series trailers are braked trailers with a total weight of 2700 or 3500 kg. Two different designs – ALU MINI EXCAVATOR with all-aluminium body and aluminium ramps, or ZN MINI EXCAVATOR with galvanized sheet metal side boards and iron ramps.


V-drawbar design, 13" or 14" wheels, 13-pole electrical installation and plug, front basket or support to facilitate transport of the mini excavator bucket. ZN MINI EXCAVATOR design with 15 mm thick waterproof plywood flooring. Integrated ramps can be slid aside according to the required wheel track, supports are included with the ramps. Aluminium rear side board (ALU MINI EXCAVATOR) or plywood rear side board (ZN MINI EXCAVATOR) is located between the ramps.

As standard, MINI EXCAVATOR is equipped with 6 pcs anchoring eyes (ALU MINI EXCAVATOR) or 4 pcs 1500 kg folding anchoring eyes, jockey wheel with holder, wheel scotch block and AGADOS SMART rear LED lighting.



130
km

Flexible trailer
instead of
a truck

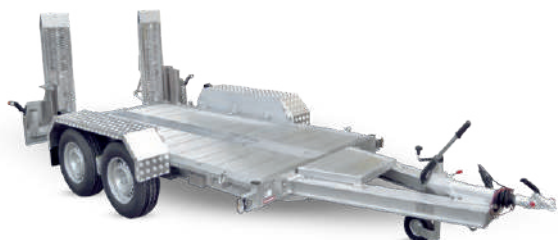

ALU MINI EXCAVATOR plateau



Transport of MINI EXCAVATORS and small construction equipment



ALU MINI EXCAVATOR



Ramps with supports, sliding aside according to the wheel track of the transport machine



ZN MINI EXCAVATOR

VARIANTS, MODIFICATIONS, ACCESSORIES

MINI EXCAVATOR trailers can be equipped with useful accessories or various modifications can be selected

- coupling lock
- height-adjustable drawbar with coupling possibility of DIN 40 or ISO 50
- spare wheel
- spare wheel holder
- axle dampers (shock absorbers)

TECHNICAL SPECIFICATION

Trailer type	Total weight (kg)	Payload capacity (kg)	Loading platform (mm)	Number of axles
MINI EXCAVATOR 3.1×1.85 m (ZN)	2700	2000	3100×1850×350	2
	3500	2730		
MINI EXCAVATOR 3.3×1.85 m (ZN)	3500	2710	3300×1850×350	
MINI EXCAVATOR B2 AL	3500	2800	3600×1860×300	

The total weight can be reduced on request.

BOX TRAILERS



Plywood box
trailers



Sandwich box
trailer



VZ 27 N1
sandwich box trailer



PLYWOOD BOX TRAILERS

BOX TRAILERS

VARIABILITY OF OUR BOX TRAILER DESIGNS WILL SATISFY ALL YOUR REQUIREMENTS



PLYWOOD BOX trailers are unbraked trailers with total weight of 750 kg or braked trailers with total weight up to 2700 kg.

Tubular drawbar or V-drawbar design, 13" wheels, white plywood sideboards 1500 mm or 1800 mm, 7-pole electrical installation and plug for unbraked versions and 13-pole electrical installation and plug for braked trailers. 15 mm thick waterproof plywood flooring. Solid welded chassis frame with reinforcements, lockable double-wing rear door with rod locking system.

As standard, braked versions of PLYWOOD BOX trailers are equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.





Spare wheel with a holder on the front board



VZ 26 AL B1, 1200 kg + aluminium cover, ramp



Brown plywood box trailer



VZ 31 box with side and rear flaps



Side flap with gas props



VZ 26 B1, 1200 kg, 1500 mm, door



VZ 21 box, drawbar

VZ 26 N1, 750 kg + ramp

VARIANTS, MODIFICATIONS, ACCESSORIES

PLYWOOD BOX trailers can be equipped with useful accessories or various modifications can be selected

- side door with rod locking system
- side sales flap
- rear ramp in place of double-wing door
- interior lighting
- metal sheet flooring
- aluminium anchoring rail
- jockey wheel with holder
- supporting leg with holder
- coupling lock
- reinforced AGADOS axle
- reinforced coupling
- reinforced wheels
- spare wheel with holder
- axle dampers (shock absorbers)
- coupling with a stabilizer



SANDWICH BOX TRAILERS

BOX TRAILERS

SANDWICH BOARDS = LIGHTNESS, STRENGTH, DURABILITY



SANDWICH BOX trailers are unbraked trailers with total weight of 750 kg or braked trailers with total weight up to 3500 kg.

V-drawbar design, 13" wheels, sideboards made of white sandwich panels (thickness 30 mm) of height up to 2400 mm, 7-pole electrical installation and plug for unbraked versions and 13-pole electrical installation and plug for braked trailers. 15 mm thick waterproof plywood flooring. Solid welded chassis frame with reinforcements. Rear door in stainless steel frame, with stainless steel hinges, lockable stainless steel rod locking system. The door wing is hemmed with ALU profile with rubber gasket.

As standard, braked versions of SANDWICH BOX trailers are equipped with jockey wheel with holder, wheel scotch blocks and AGADOS SMART rear LED lighting.



VZ series chassis



DONA series chassis



ADAM series chassis



Your cargo is protected against water, dust, and other external influences



Chassis with wheels under the loading platform



Chassis with wheels along the loading platform



VZ 26 with opening flaps



DONA series chassis with a side flap along the entire loading platform



ADAM series chassis – tilting design with ramps and a side flap



VZ 26 in Toolbox design



VZ 31 B2, 2000 kg with protective inner lining

VARIANTS, MODIFICATIONS, ACCESSORIES

SANDWICH BOX trailers can be equipped with useful accessories or various modifications can be selected

- side door with rod locking system
- side sales flap in the maximum size
- rear aluminium ramp
- interior lighting
- metal sheet flooring
- anchoring rail for spacer bars installed at walls
- anchoring rail for fastening straps installed by the floor
- anchoring eyes folding in the floor
- jockey wheel with holder
- supporting leg with holder
- coupling lock
- reinforced AGADOS axle for unbraked trailers
- reinforced coupling for unbraked trailers
- reinforced wheels for unbraked trailers
- spare wheel with holder
- axle dampers (shock absorbers)
- coupling with a stabilizer

O3, O4 CATEGORY TRAILERS



MADONA





TECHNICAL DESCRIPTION

- O3 category cargo trailers with a total weight up to 10,000 kg and O4 category cargo trailers with a total weight over 10,000 kg
- single or double axle, air braked
- solid all welded frame, hot-dip galvanized
- BPW axles with air suspension and BPW drum brakes (disc brakes available at extra cost), self-adjusting brake levers
- Wabco two-hose breaking system including ABS/EBS with Tristop cylinders and control unit
- wheels:
 - B1 design – 17,5" – dual wheel
 - B2 design – 17,5"
- air handbrake + emergency brake (when trailer is uncoupled)
- loading platform lowering system with variable loading platform height adjustment when loading or unloading
- standard travel loading platform height 950 mm
- DIN 40 eye (alternatively DIN 50)
- drawbar:
 - angled drawbar (upper hitch): standard connection height 720 mm, or according to the customer's request
 - underhanging drawbar (lower hitch) – height according to customer's request
- 21 mm thick waterproof anti-slip plywood flooring
- U-shaped anchoring eyes in the edging
- 24 V ASPOCK LED lighting (JOKON, FRISTOM, LUCIDITY)
- 24 V power supply with two possible variants of connecting cables:
 - 15-pin control cable in accordance with ISO 12098
 - two 7-pin plugs in accordance with ISO 1185, 3731
- maximum speed 90 km/h for O3 version
- maximum speed 80 km/h for O4 version



STANDARD EQUIPMENT

- folding support leg at the front of the drawbar
- two rear lowering support legs
- underrun protection
- 24 V electrical installation and plug
- spare wheel holder under the loading platform (lowering mechanism with a crank-handle and rope)
- two stainless steel wheel scotch blocks



The length of the trailer can be adjusted to your order




Plateau (no side boards)



Construction for canvas



WABCO braking system

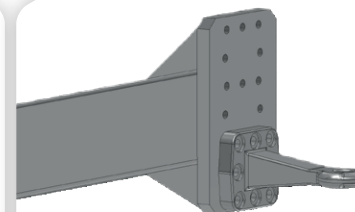

Height-adjustable coupling board



Chassis



Flatbed with canvas



Chassis supporting a pump



Chassis supporting a power generator

VARIANTS, MODIFICATIONS, ACCESSORIES

O3 and O4 series trailers can be equipped with useful accessories or various modifications can be selected

- plateau
- flatbed – removable 350 mm AL profile side boards, not divided up to the length of 6.6 m, over 6.7 m divided with a central post
- fixed front board with a standard height of 1200 mm or according to the customer's request
- flatbed with canvas and construction of total height up to 4800 mm
- flatbed with a folding canvas with construction (left side, right side, top), rear double door
- lower AL boards for plateau instead of canvas with construction
- trapezoidal aluminium sheet flooring
- other variants on request – chassis for a power generator, a pump etc.
- O4 series freight trailer with a total weight up to 1800 kg

TECHNICAL SPECIFICATION

Loading platform length (mm)	Total trailer length (to the center of coupling)		Number of euro pallets
	PLATEAU design	FLATBED design	
4150	5850	5885	10
5000	6700	6735	12
5700	7400	7435	14
6100	7800	7835	16
6600	8300	8335	16
7400	9100	9135	18
8600	10300	10335	21

Trailer length can be customized to the length of the whole vehicle set.

ALUMINIUM PROGRAMME

AGADOS spol. s r.o. is an exclusive importer of products of the Italian company Definitive CLM s.r.l. to the Czech Republic. Definitive CLM s.r.l. is an Italian company established in 1992 and today operating worldwide. It specializes in development and production of aluminium programme, especially for construction and garden equipment.

Why a product by Definitive CLM s.r.l.?

- experience with aluminium programme
- wide range of standard programmes
- exclusive use of high-strength aluminium alloys
- own development
- exclusive double "T" profile of the ramps ensuring high strength and at the same time low own weight
- warranty and post-warranty service
- certification by TÜV Rheinland Italia
- certification of products by DEKRA testing laboratory

DELIVERY DATES

All the products in the ALUMINIUM PROGRAMME catalogue www.agados.cz/hlinikovy-program can be ordered. Delivery dates depend on transport and will be determined individually. The usual delivery time is approx. 2 months from the order.

The ramps which are in stock can be found at www.agados.cz/nahradni-dily/najezdy.



TRAILER SERVICE

- Warranty and post-warranty service and guarantee inspections of trailers
- Brake system adjustment
- Electrical wiring repairs
- Repairs of mechanically damaged trailers and trailers after an accident
- Service centres at the production plants in Velké Meziříčí and Modra as well as at sales partners throughout the Czech and Slovak Republics



SPARE PARTS, TRAILER TECHNOLOGY

- Sales of spare parts and trailer technology at the production plants in Velké Meziříčí and Modra as well as at sales partners throughout the Czech and Slovak Republics
- E-shop with fast delivery to the Czech and Slovak Republics





● **AGADOS spol. s r.o.**
Průmyslová 2081, 594 01 Velké Meziříčí
www.agados.cz

● **Agados Slovakia, s.r.o.**
Dolná 142, 900 01 Modra
www.agados.sk



Document version: 05/2023

Agados cannot be held responsible for any printing errors in this catalogue!

Data such as payload weights and dimensions are only approximate and depend on the technical design and equipment of the trailer and may differ from the actual design of the trailer.

Trailer photos are for illustrative purposes only and may show additional accessories.